


EC-URP-24-SD2

Patch Panel NETLAN 19", 1U, 24 Ports, Cat. 5e (Class D), 100MHz, RJ45/8P8C, 110/KRONE, T568A/B, Shielded, Black

- ✓ Universal connectors KRONE / 110
- ✓ Best prices

The patch panel EC-URP-24-SD2 is designed for mounting in a 19" cabinet or rack and has 24 RJ45 / 8P8C ports of category 5e. The patch panel is made in classic black and has universal 110 / KRONE contacts with color marking according to the T568A standard / B on the back side. For ease of administration, all ports are numbered, and there are additional marking pads on the patch panels.

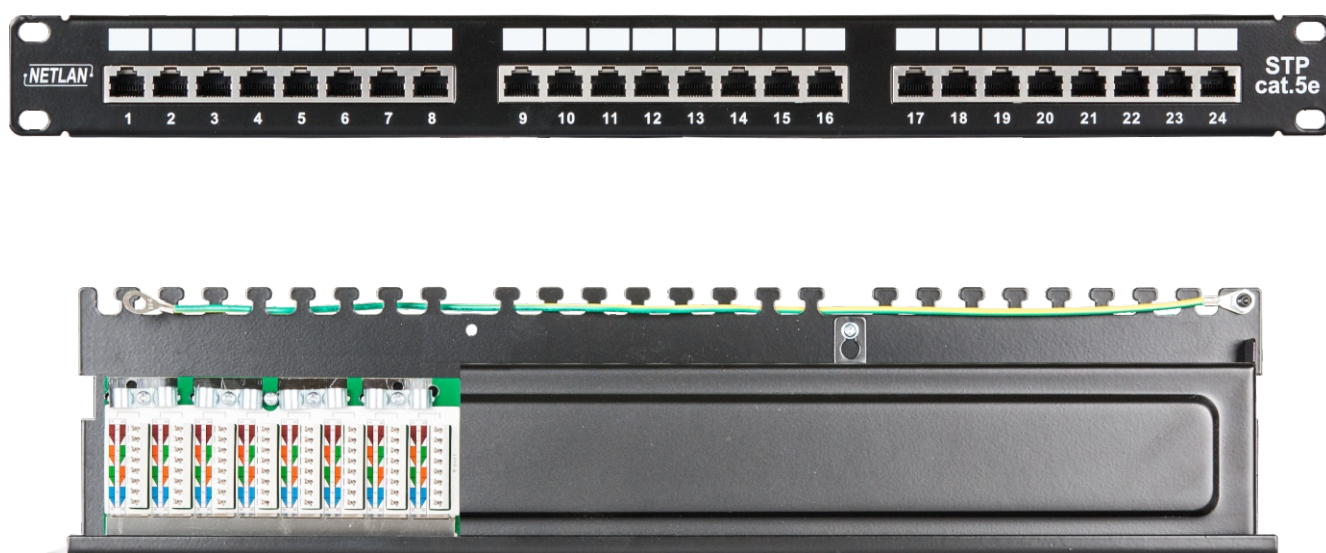

Basic equipment:

Patch panel	1 pc.
Screed Kit	1 pack
Screw-Nut	8 pcs

Manufacturer reserves the right to change external view and characteristics of product without reducing it's consumer properties

CHARACTERISTICS

P/N	EC-URP-24-SD2
Category	5e
Bandwidth, MHz	100
Execution	Shielded
Number of ports	24
Height, U	1
Connector type	RJ45/8P8C
Contact coating material	Gold, 3 microinches
Type of IDC contacts	110/KRONE
IDC coating material	C5191
Permissible diameter of conductors, mm	0.511-0.404
Layout diagram	T568A/B
Plastic material	UL94V-0
Marking	All ports are numbered, there are additional marking areas
Installation	19" Cabinet or rack
Material of the supporting structure	Steel 1.5 mm
Color	Black
Compliance	ISO/IEC 11801, EN 50173 TIA/EIA-568
Supported Applications	10BASE-T, 100BASE-TX, 100BASE-T4, 1000BASE-T, ATM-25, ATM-51, ATM-155, 100VG-AnyLan, TR-4, TR-16 Active, TR-16 Passive
Temperature ranges	Storage -40 to +70 ° C. Installation 0 to +50 ° C. Operating 0 to +70 ° C
Warranty	1 year

ORDERING TABLE

P/N	Category	Execution	Height, U	Number of ports	Volume, m3	Weight, kg
EC-URP-24-SD2	5e	Shielded	1	24	0,003156	1,690

Manufacturer reserves the right to change external view and characteristics of product without reducing it's consumer properties