


EC-UP6P6C-UC-003-TR-1000

NETLAN Modular Plug RJ12/6P6C Cat. 3 (Class C), 16MHz, 3μinch, Universal Knife, for Conductor Thickness 0,40-0,45mm, Unshielded, 1000pcs./bag

- ✓ Conductor diameter from 0.40 to 0.45 mm
- ✓ Gold plating contacts 3 mcd

Connectors EC-UP6P6C-UC-003-TR-1000 are designed for terminating single-core and multi-core 6 wired communication cables, can also be used to terminate 2 pair cables of both types of conductors. The connector is unshielded and meets category 3. The connector housing is made of polycarbonate conforming to UL 94-V2.

It is delivered in individual packages of 100 pieces combined in a transport packaging containing 1000 pieces.

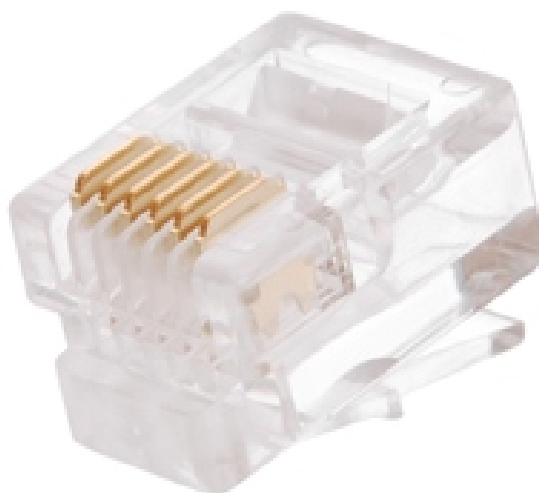

Basic equipment:
Plugs

1000 pcs

Manufacturer reserves the right to change external view and characteristics of product without reducing its consumer properties

CHARACTERISTICS

P/N	EC-UP6P6C-UC-003-TR-1000
Category	3
Bandwidth, MHz	16
Connector type	RJ12/6P6C
Connection style	Unshielded
Contact plating	Gold, 3µinch
Diameter of conductors, AWG	25-26/0.40-0.45 mm
Type of conductors	Solid
Diameter of conductors, mm	0.45
Color	Transparent
Housing material	Polycarbonate, meets UL 94-V2
Temperature ranges	Storage from -25 to +55 °C. Operation from -25 to +55 °C
Warranty	1 year
Packaging	Polyethylene bag (1000 pcs.)

ORDERING TABLE

P/N	QTY	Cat.	Type	Color	Volume, m3	Weight, kg
EC-UP6P6C-UC-003-TR-1000	1000	3	UTP	Transparent	0.002800	0.960