

NMC-KJUE2-VI-WT - Cat.6 NIKOMAX Keystone Jack, Cat.6 (Class E), 250 MHz, RJ45 / 8P8C, 110 / KRONE, T568A / B, 180 degrees, Unshielded, White

Contact plating material in the connector - gold (50 micro-inch)

√ Sealing of contacts - 180 °

NIKOMAX Keystone jacks are designed for installation in faceplates, surface mounting boxes and modular patch panels. Keystone jacks are widely used for connection workplaces to local network.

NMC-KJUE2-VI-WT (Cat.6) keystone jacks are made from durable plastic in unshielded housing.IDC offer two wiring standards: T568A/B. All modules are made in the same design and fully compatible with all NIKOMAX components. Only 16 mm width and a standard height allows you to install them in any snap-in patch panels, including models with 0.5U height. Jacks require a punchdown tool with 110/KRONE blades for termination.



NMC-KJUE2-VI-WT

The manufacturer reserves the right to change the appearance and characteristics of the product, without reducing its consumer properties




Specifications

Part Number	NMC-KJUE2-VI-WT		
Category	6		
Bandwidth, Mhz	250		
Connection style	Unshielded		
Connector type	RJ45/8P8C		
Connector material in connector	Phosphor bronze		
Contact coating material	Gold (50 micro-inches)		
Number of cable connections	Not less than 750		
Type of IDC contacts (seal)	180 degrees - 110 / KRONE		
Layout diagram	T568A/B		
Permissible diameter of conductors	~24-22 AWG (0.50-0.65 mm)		
IDC Contact material	Phosphor bronze		
IDC coating material	Tin		
Plastic material	High-strength, non-flammable, compliant to UL94V-0		
Color	White		
Dimensions, WxHxD	16 x 20.3 x 27.8		
Compliance	Exceeds standards: ISO / IEC 11801, EN 50173 and TIA / EIA-568		
Supported Applications	10BASE-T, 100BASE-TX, 100BASE-T4, 1000BASE-T,		
	ATM-25, ATM-51, ATM-155, 100VG-AnyLan, TR-4, TR-16 Active, TR-16 Passive		
Temperature ranges	Storage from -40 to + 70 °C. Operation from -10 to +60 °C		
Packaging	Individual - Polyethylene Package		
Warranty	5 years		

Order table

Part number Cat.		Connection style	Transport box		
Tare maniber	cat.	Connection style	Quantity	Dimensions, mm	Weight, kg
NMC-KJUE2-VI-WT	6	Unshielded	250	530x310x230	3.8

Dimensional drawings

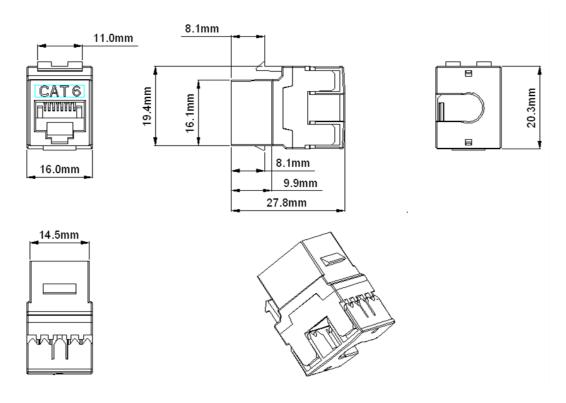

The manufacturer reserves the right to change the appearance and characteristics of the product, without reducing its consumer properties