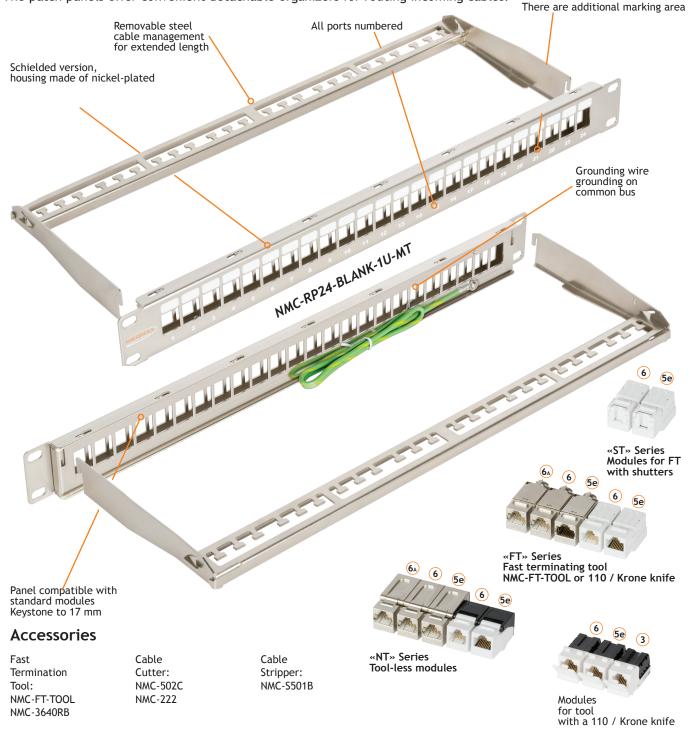Modular Patch Panels are designed for connecting different SCS subsystems and network equipment to each other with patch cords.

NIKOMAX NMC-RP24-BLANK-1U-MT has a standard height of 1U and 24 nests for Keystone jacks. The modular design is extremely easy to install and allows the flexibility to combine different types of connectors and categories on a single frame. If required, the jack can easily be removed and rearranged to another port or panel. All ports of panel are numbered and have additional labeling area.

The patch panel is made of 1.5 mm steel and is suitable for both shielded and unshielded jacks. For better shielding against electromagnetic interference and improve communication with unpainted rails cabinet, galvanized steel panels coated with nickel.

The patch panels offer convenient detachable organizers for routing incoming cables.

Removable steel cable management for extended length

All ports numbered

There are additional marking area

Schielded version, housing made of nickel-plated

Grounding wire grounding on common bus

NMC-RP24-BLANK-1U-MT

Panel compatible with standard modules Keystone to 17 mm

«ST» Series Modules for FT with shutters

«FT» Series Fast terminating tool NMC-FT-TOOL or 110 / Krone knife

«NT» Series Tool-less modules

Modules for tool with a 110 / Krone knife

Accessories

Fast Termination Tool: NMC-FT-TOOL NMC-3640RB	Cable Cutter: NMC-502C NMC-222	Cable Stripper: NMC-S501B

The manufacturer reserves the right to alter the appearance and characteristics of the product, without compromising the product's functionality
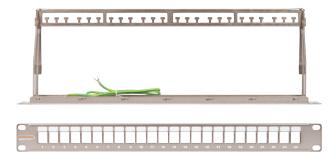
Specifications

	NMC-RP24-BLANK-1U-MT
Type	Shielded
Ports	24
Type of module to be installed	Keystone (no wider than 17mm)
Marking	All ports are numbered, there are additional labeling area
Installation	19" Cabinet or rack
Height	1 U (44.5 mm)
Depth	157 mm
Housing Material	Nickel-plated steel, 1.5 mm
Color	Metallic (Nickel)
Temperature Ranges	Storage -40 to +70 ° C. Installation 0 to +50 ° C. Operating -10 to +60 ° C
Packaging	Cardboard box
Warranty	1 year

Ordering Information

Type	Cat.	Modules series «Fast Termination» For quick sealing NMC-FT-TOOL or a 110 / KRONE knife		Modules «NT» series Tool-less	Modules for punch down tool with a 110/KRONE knife
		Basic(FT)	With shutters (ST)		
Shielded	6$_A$	NMC-KJSA2-FT-MT	–	NMC-KJSA2-NT-MT	–
	6	NMC-KJSE2-FT-MT	–	NMC-KJSE2-NT-MT	–
	5e	NMC-KJSD2-FT-MT	–	NMC-KJSD2-NT-MT	–
Unshielded	6	NMC-KJUE2-FT-WT	NMC-KJUE2-ST-WT	NMC-KJUE2-NT-WT	NMC-KJUE2-WT
	5e	NMC-KJUD2-FT-WT	NMC-KJUD2-ST-WT	NMC-KJUD2-NT-WT	NMC-KJUD2-WT
	3	–	–	–	NMC-KJUC3-WT

Ordering Table

Part Number	Ports	Height, U	Individual package		Freight package		
			Dimensions,mm	Weight,kg	Quantity	Dimensions,mm	Weight, kg
NMC-RP24-BLANK-1U-MT	24	1	510x80x60	0.800	15 pcs.	515x400x230	13.1

NMC-RP24-BLANK-1U-MT
1U, 24 ports under UTP/STP modules

Package Content

Patch panel - 1pc.
Cable organizer - 1 pc.
Cable tie - 24 pcs.
Grounding Wire - 1 pc.
Screw-washer-nut - 4 pcs.
Installation Instruction - 1 pc.

The manufacturer reserves the right to alter the appearance and characteristics of the product, without compromising the product's functionality