

Patch Panels

Modular Patch Panel, 0.5U

Modular Patch Panels are designed for connecting different SCS subsystems and network equipment to each other with patch cords.

NIKOMAX NMC-RP24-BLANK-HU-MT has 24 nests for Keystone jacks with a height of only 0.5 U. This solution is ideal when it is necessary to provide a high port density (e.g., data centers) or to extend the network in the limited space of the cabinet. The modular design is extremely easy to install and allows the flexibility to combine different types of connectors and categories on a single frame.

All ports are numbered panels and have added labeling area. The patch panel is made of 1.5 mm steel and is suitable for both shielded and unshielded jacks. For better shielding against electromagnetic interference and improve communication with unpainted rails cabinet, galvanized steel panels coated with nickel.

The patch panels offer removable organizers for routing incoming cables.

Removable plastic cable management

All ports numbered

Shielded version, housing made of nickel-plated

There are additional marking area

Grounding wire grounding on common bus

NMC-RP24-BLANK-HU-MT

Panel compatible with standard modules Keystone to 17 mm

High-density Solution: up to 48 ports in a single frame

«ST» Series Modules for FT with shutters

«FT» Series Fast terminating tool NMC-FT-TOOL or 110 / Krone knife

«NT» Series Tool-less modules

Modules for tool with a 110 / Krone knife

Accessories

Fast Termination Tool: NMC-FT-TOOL NMC-3640RB	Cable Cutter: NMC-502C NMC-222	Cable Stripper: NMC-S501B
---	--------------------------------	---------------------------

The manufacturer reserves the right to alter the appearance and characteristics of the product, without compromising the product's functionality

Specifications


NMC-RP24-BLANK-HU-MT	
Type	Shielded
Number of Ports	24
Type of module to be installed	Keystone (not wider than 17 mm and not more than 22 mm)
Marking	All ports are numbered, there are additional labeling area
Installation	19" Cabinet or rack
Height	0.5 U (22 mm)
Depth	95 mm
Housing Material	Nickel-plated steel, 1.5 mm
Color	Metallic (Nickel)
Temperature Ranges	Storage -40 to +70 ° C. Installation 0 to +50 ° C. Operating -10 to +60 ° C
Packaging	Cardboard box
Warranty	1 year

Ordering Table

Type	Cat.	Modules «Fast Termination» series For quick sealing NMC-FT-TOOL or 110 / KRONE knife		Modules «NT» series Tool-less	Modules for punch down tool with a 110/KRONE knife
		Basic (FT)	With shutters (ST)		
Shielded	6 _A	NMC-KJSA2-FT-MT	–	NMC-KJSA2-NT-MT	–
	6	NMC-KJSE2-FT-MT	–	NMC-KJSE2-NT-MT	–
	5e	NMC-KJSD2-FT-MT	–	NMC-KJSD2-NT-MT	–
Unshielded	6	NMC-KJUE2-FT-WT	NMC-KJUE2-ST-WT	NMC-KJUE2-NT-WT	NMC-KJUE2-WT
	5e	NMC-KJUD2-FT-WT	NMC-KJUD2-ST-WT	NMC-KJUD2-NT-WT	NMC-KJUD2-WT
	3	–	–	–	NMC-KJUC3-WT

Ordering Table

Part Number	Ports	Height, U	Individual package		Freight package		
			Dimensions,mm	Weight, kg	Quantity	Dimension,mm	Weight, kg
NMC-RP24-BLANK-HU-MT	24	0.5	490x110x50	0.400	15 pcs.	515x375x240	7.0

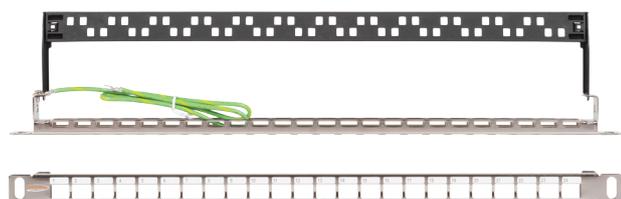

NMC-RP24SE2-HU-BK
0.5U, STP, 24 ports Cat.6

Package Content

- Patch panel - 1pc.
- Cable organizer - 1 pc.
- Cable tie - 24 pcs.
- Grounding Wire - 1 pc.
- Screw-washer-nut - 2 pcs.
- Installation Instruction - 1 pc.