

NMF-OA2MM-FN-LCU-LCU-BG-50

NIKOMAX optical fiber adapter, Multi-mode 50/125µm, OM4, LC/UPC-LC/UPC, full flange, duplex, beige, 50pcs

Optical fiber adapters are designed for connecting patch cords and cables terminated with the same type of connector. Adapters are installed in removable panels in optical patch panels and provide a reliable connection, as well as stable parameters of detachable connection.


The LC adapter is made of plastic of different colors for better visual identification of the adapter type. Beige is used to connect the connectors with UPC polishing and MM fiber type. Mounting of LC type adapters to removable panels in optical crossways is carried out using metal latches and screws.

Centering bushings are made of ceramic for all optical connecting adapters intended for single-mode fiber. All adapters are equipped with plugs for protection against dirt and dust.

Plastic corpus with different colors
for better visual identification

Holes for screws for
improved fixation
on removable panels

Protective caps

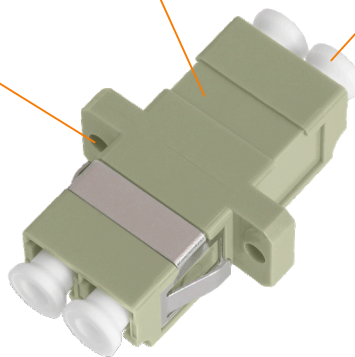

NMF-OA2MM-FN-LCU-LCU-BG-50

Package Content

Optical fiber adapter

50 pcs

The manufacturer reserves the right to change the appearance and characteristics of the product, without reducing its consumer properties

Specification

| | |
|----------------------------|---|
| PN | NMF-OA2MM-FN-LCU-LCU-BG-50 |
| Fiber type | Multi Mode 50/125 |
| Adapter type | LC |
| Polishing | UPC |
| Execution | Duplex |
| Corpus material | Plastic |
| Color | Beige |
| Central bushing material | Ceramics |
| Insertion loss, dB | ≤0,2 |
| Return loss, dB | ≥50 |
| Number of switching cycles | No less than 1000 |
| Temperature ranges | Laying -40 to +85 ° C. Operation -40 to +85 ° C |
| Individual packing | Plastic bag |
| Warranty | 1 year |

Ordering Table

| PN | Execution | Adapter type / Polishing | Fiber tyoe | Individual packing | |
|----------------------------|-----------|--------------------------|------------|--------------------|------------|
| | | | | Volume, m3 | Weight, kg |
| NMF-OA2MM-FN-LCU-LCU-BG-50 | Duplex | LC/UPC - LC/UPC | MM | | |

The manufacturer reserves the right to change the appearance and characteristics of the product, without reducing its consumer properties