


Fiber optic patch cords (pigtailed) are designed to connect fiber optic cable to active network switches and patch panels by fusion splicing.


Fiber Optic Pigtailed are manufactured with either multimode or single-mode fiber and terminated only on one side by SC, LC, FC, ST connector type and polished UPC or APC in a diameter of 0.9 mm and tight buffered outer jacket. Outer jacket is color coded to differentiate multimode or single-mode.



**NMF-PT1M4C0-SCU-XXX-001-2**  
MM 50/125 OM4, SC/UPC-Empty,  
LSZH, D=0.9mm, 1m

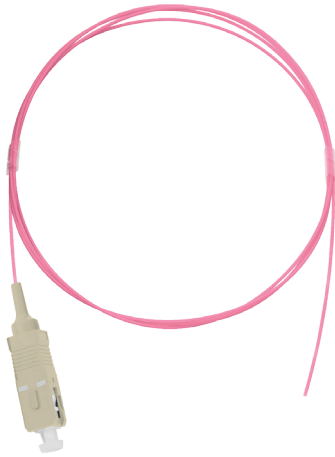


**NMF-PT1M4C0-LCU-XXX-001-2**  
MM 50/125 OM4, LC/UPC-Empty,  
LSZH, D=0.9mm, 1m

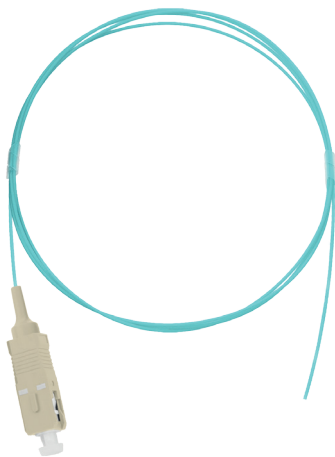

**NMF-PT1M3C0-SCU-XXX-001-2**  
MM 50/125 OM3, SC/UPC-Empty,  
LSZH, D=0.9mm, 1m



**NMF-PT1M3C0-LCU-XXX-001-2**  
MM 50/125 OM3, LC/UPC-Empty,  
LSZH, D=0.9mm, 1m

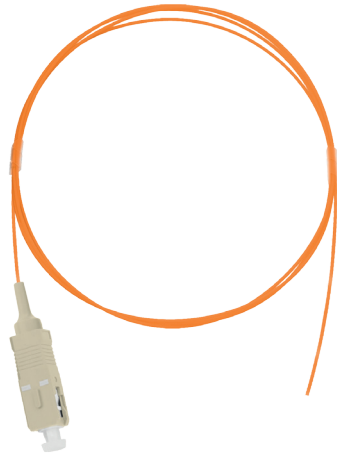

**NMF-PT1M2C0-SCU-XXX-001-2**  
MM 50/125 OM2, SC/UPC-Empty,  
LSZH, D=0.9mm, 1m



**NMF-PT1M2C0-LCU-XXX-001-2**  
MM 50/125 OM2, LC/UPC-Empty,  
LSZH, D=0.9mm, 1m

## Specification

Product Number	NMF-PT1M4C0-yyy-XXX-001-2	NMF-PT1M3C0-yyy-XXX-001-2	NMF-PT1M2C0-yyy-XXX-001-2
Type of optical fiber	Multimode fiber 50/125		
Fiber class standard	ISO/IEC 11801 OM4	ISO/IEC 11801 OM3	ISO/IEC 11801 OM2
Type of Cable	Patch cord (pigtail)		
Connector / Polishing	SC/UPC	LC/UPC	SC/UPC
Outer jacket material	LSZH		
Diameter of outer jacket	0.9 mm		
Outer jacket color	Magenta	Aqua	Orange
Insertion loss	≤ 0.3 dB		
Return loss	≥ 50 dB		
Length	1m		
Temperature ranges	Storage from -20 to +65 ° C. Operation -20 to +65 ° C		
Individual packing	Individual - Polybag (2pcs per bag)		
Warranty	1 year		

## Ordering Table

Product Number	Fiber type	Connector / Polishing	Length, m	Quantity	Individual packing	
					Volume, m3	Weight, kg
NMF-PT1M4C0-SCU-XXX-001-2	MM 50/125 OM4	SC/UPC	1	2	0.000225	0.011
NMF-PT1M4C0-LCU-XXX-001-2	MM 50/125 OM4	LC/UPC	1	2	0.000225	0.011
NMF-PT1M3C0-SCU-XXX-001-2	MM 50/125 OM3	SC/UPC	1	2	0.000225	0.011
NMF-PT1M3C0-LCU-XXX-001-2	MM 50/125 OM3	LC/UPC	1	2	0.000225	0.011
NMF-PT1M2C0-SCU-XXX-001-2	MM 50/125 OM2	FC/UPC	1	2	0.000225	0.011
NMF-PT1M2C0-LCU-XXX-001-2	MM 50/125 OM2	LC/UPC	1	2	0.000225	0.011

*Customized lengths and variants of connectors available to order*

### Where:

**yyy-xxx** – Connector / Polishing (SCU-xxx = SC/UPC - Empty, LCA-xxx = LC/APC - Empty, etc...)

Mounting straps are terminated with a connector only on one side, with the exception of uncut cords